



Residential Gas Water Heaters

PREMIER® POWER VENT 90% THERMAL EFFICIENCY VERSATILE POWER VENT DESIGN

Today's homes demand more hot water than ever before, and the 90% efficient Premier® power vent gas water heater offers unprecedented levels of performance to meet the need. The 50-gallon Premier® delivers more hot water than a standard 75-gallon atmospheric gas water heater. In fact, the fully condensing Premier® design is so advanced, it can deliver "continuous hot water for shower after shower" at a constant flow of over 3 gallons per minute.* Yet Premier® is easy to install, with height, diameter and installation requirements similar to standard power vent units.

HELICAL INTERNAL HEAT EXCHANGER

- Spiral heat exchanger keeps hot combustion gases in the tank longer to lengthen the heat transfer cycle
- Positioned in the center of the tank for more even heat distribution
- Operates at 90% thermal efficiency, which saves money on operating costs compared to a standard 78% efficient gas water heater

POWER VENT DESIGN

- Combined vertical and horizontal runs terminating through an outside wall. Vents using PVC, CPVC, or polypropylene pipe. Canadian installations require ULC S636 approved pipe for venting.
 - 2" pipe, vents up to 25 equivalent feet
 - 3" pipe, vents up to 65 equivalent feet
 - 4" pipe, vents up to 128 equivalent feet

MODULAR BLOWER

- Equipped with 120 volt, 60 Hz electrical system (rating 5 amps or less), 6-foot cord with standard 3-prong connector
- 2" PVC pipe, elbows and condensate drain supplied to connect heat exchanger outlet to blower

SIDE-MOUNTED HOT AND COLD RECIRCULATING TAPS

- Allows Premier® to be installed as part of combination space heating/water heating applications or any system requiring a recirculating hot water loop, including radiant floor heating

INTELLI-VENT™** GAS CONTROL

- Equipped with a robust silicon nitride hot surface ignitor — no standing pilot
- Advanced electronics for more precise control of water temperature and easy to understand system diagnostics

BLUE DIAMOND® GLASS COATING TWO HEAVY-DUTY ANODE RODS

- Provide maximum protection against corrosion

GREEN CHOICE® GAS BURNER

- Patented eco-friendly burner design reduces NOx emissions by up to 33% and complies with Low-NOx emission requirements of less than 40 ng/J.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE: 150 PSI

CODE COMPLIANCE

- Meets UBC, CEC and ICC National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IES 90.1.

DESIGN-CERTIFIED BY UNDERWRITERS LABORATORIES

- Certified at 300 psi test pressure and 150 psi working pressure. Listed according to ANSI Z21.10.3 - CSA 4.3 standards governing storage tank-type water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com

* Continuous hot water based on 3.07 GPM continuous flow with a 65°F inlet water temperature, 110°F outlet temperature, and a unit installed per the manufacturer's instructions.

**Intelli-Vent™ is a trademark of Emerson Electric Company



SERIES 110






Residential Gas Water Heaters

Model Number	Gallon Capacity	Recovery @ 90°F Rise Gallon Per Hour	BTU Input Per Hour	First Hour Delivery Gallons	Dimensions in Inches										Approx. Shipping Weight (lbs)
					A	B	C	D	E	F	G	H	J	K	
GP6 50 YTVIT	50	92	76,000	127	71-1/8	68-5/8	52	21	9-1/8	12	22	8	15-3/4	27	210

Available in natural gas only.
 Top Inlet and outlet connections: 3/4" male NPT
 Circulation loop connections: 3/4" female NPT
 Standard model certified for sea level to 5,300 ft. elevation. Order SMR K30 for elevations to 10,100 ft.
 Optional Condensate Neutralization Kit available (Part Number 9007959005).

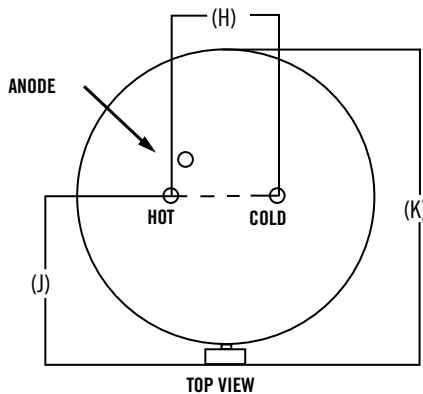

INSTALL IN ACCORDANCE WITH LOCAL CODES

