



COMMERCIAL-GRADE RESIDENTIAL GAS WATER HEATERS

PROLINE® XE HIGH EFFICIENCY COMMERCIAL-GRADE RESIDENTIAL

INSTALLATION FRIENDLY

- Allows for easy replacement of standard atmospheric vent heaters.
- Easily connects to existing B-vent.

FAN-ASSISTED, CATEGORY 1 APPLIANCE

- Plugs into standard 110/120V outlet (10 foot power cord included).

24V ELECTRONIC CONTROLS

- Tighter differential for more consistent hot water delivery.

ELECTRONIC IGNITION

- The durable hot surface ignitor eliminates pilot relight issues (no standing pilot).

LCD USER INTERFACE

- Easy-to-read, eye level display. Simple temperature settings and adjustments. Service diagnostics are in plain text.

POWERED ANODE ROD

- Powered anodes are non-sacrificial, so they do not deplete over time. Additionally, they provide exceptional performance in all water conditions.

MEETS ENERGY EFFICIENCY REQUIREMENTS FOR MOST GAS UTILITY REBATE PROGRAMS AND IS ENERGY STAR® QUALIFIED

DURABLE TAMPER-RESISTANT BRASS DRAIN VALVE

DYNACLEAN™ DIFFUSER DIP TUBE

- Helps reduce lime and sediment buildup, maximizes hot water output.
- Made from long-lasting PEX cross-linked polymer.

GREEN CHOICE® GAS BURNER

- Patented “Eco-Friendly” Green Choice® gas burner reduces NOx emissions by 33% compared to standard burners and meets low NOx requirements of less than 40ng/j.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

CODE COMPLIANCE: UBC, CEC, SBCC, CABO, HUD, BOCA NATIONAL CODES, CURRENT EDITION ASHRAE/IES 90.1 AND 2004 NAECA STANDARDS

DESIGN-CERTIFIED BY CSA INTERNATIONAL

- According to ANSI Z21.10.1 - CSA 4.1 Standards governing storage-type water heaters.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to statewaterheaters.com.



SOLID. STATE.






COMMERCIAL-GRADE


RESIDENTIAL GAS WATER HEATERS

Model Number	Gallon Capacity	First Hour Rating Gallons	Energy Factor (EF)	BTU Input Gallon Per Hour	Recovery @ 90°F Rise Gallon Per Hour	Dimensions in Inches										Approx. Shipping Weight (lbs)
						Foam Thickness	A	B	C	D	E	F	G	H	Draft Hood	
GP6 40 YPCT	40	70	0.70	40,000	43	2	61-3/4	58	20	13-1/4	8	51-1/2	23-1/4	25	3 or 4	157
GP6 50 YPCT	50	81	0.70	40,000	43	2	60-5/8	57-1/8	22	13-1/4	8	50-1/2	25-1/4	27	3 or 4	171

All dimensions in inches
 Recovery capacity based on actual performance tests.
 Water Connections – 3/4" on all models.
 Not available in LP gas (Propane).
 Certified for installations up to 00 ft. elevations.

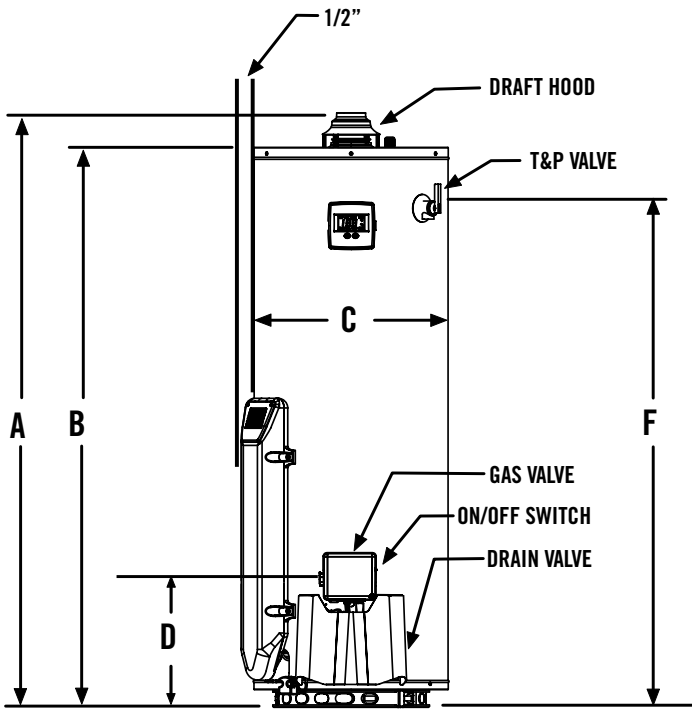

FRONT VIEW

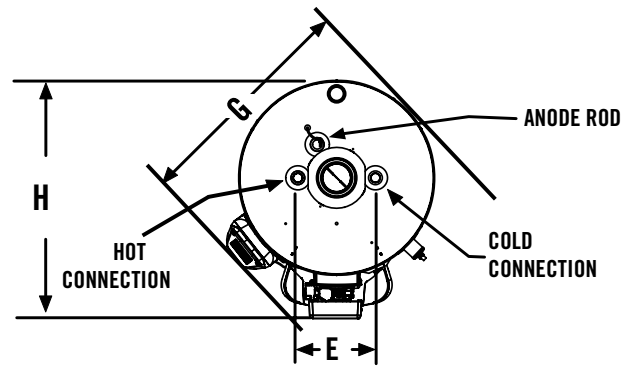

TOP VIEW

Maximum Hydrostatic Working Pressure: 150 PSI