

MODULATING ULTRA FORCE™ LV

LARGE VOLUME, HIGH EFFICIENCY POWER VENT

The full line of State Ultra Force LV condensing water heaters has been designed to provide years of dependable service and feature industry leading technology. Models are available from 150,000 to 499,900 Btu/h and all deliver thermal efficiencies up to 96%. The unique helical coil heat exchanger limits weld joints for optimal service life while maximizing heat transfer.

Ultra Force LV High Efficiency Power Vent is an industry leader in high efficiency commercial water heating. The current modulating models adjust firing rate to the specific demand further increasing efficiency and money savings.

INTELLIGENT CONTROL SYSTEM WITH TOUCH SCREEN DISPLAY AND iCOMM CONNECTIVITY ONBOARD*

- Exclusive State designed color touch display control system
- Display provides detailed water heater status information
- Precise temperature control adjustable from 90 to 180 degrees
- Built-in diagnostics
- Run history information
- Ultra Force LV comes standard with iCOMM Wi-Fi connectivity onboard. Remotely monitor and adjust the water heater via the State app. No charge connectivity using Wi-Fi or Ethernet connection.
- Intelligent Demand Response (IDR) feature senses large water draws and automatically adjusts the differential setpoint. This feature increases the hot water available when it is needed the most.

SUBMERGED COMBUSTION CHAMBER, WITH HELICAL HEAT EXCHANGER COIL

- Positioned in center of tank, surrounded by water to virtually eliminate radiant heat loss from chamber
- Direct spark ignition
- Spiral heat exchanger keeps hot burner gases swirling, uses centrifugal force to maximize efficiency of heat transfer to water in tank
- Spiral heat exchanger reduces lime scale from forming on water-side surfaces, which maintains energy efficiency over time
- ASME Construction

POWERED ANODES STANDARD ON ALL MODELS

- Provides long-lasting tank protection in varying water conditions

- Powered anodes are non-sacrificial
- Automatically adjusts output needed to properly protect the tank

PERMAGLAS® ULTRA COAT™ GLASS LINING

- Glass coating is applied using a liquid slush coating technique to ensure uniform coating
- Heat exchanger coil is glassed both externally and internally for optimum protection

MECHANICAL VENTING VERSATILITY

- Conventional power venting or direct venting
- Vents vertically or through a sidewall
- Front located exhaust and condensate connections allow for easy install and access
- Vents with low cost PVC Schedule 40 intake and exhaust pipe. Approved for optional CPVC Schedule 40, Polypropylene and AL29-4C stainless steel vent materials
- Direct-vent intake and exhaust pipe can terminate separately outside building or through single opening, using concentric vent assembly
- Canadian installations require ULC S636 PVC/CPVC, ULC S636 Polypropylene and AL29-4C stainless steel pipe for intake and exhaust

HIGH EFFICIENCY MODULATING PRE-MIX POWERED BURNER

- Down-fired pre-mix burner provides optimum efficiency and quiet operation
- Top-mounted burner position prevents condensation from affecting burner operation

5-YEAR LIMITED TANK / 1-YEAR LIMITED PARTS WARRANTY

- For complete warranty information, consult written warranty or go to hotwater.com.



SUFL-250-150A THROUGH
 SUFL-220-500A MODEL SHOWN:
 SUFL-220-500A SERIES 300/301



SOLID. STATE.



OTHER FEATURES: SPACE-SAVING DESIGN FOR INSTALLATION FLEXIBILITY

- Large volume, integrated solution eliminates need for multiple 100-gallon water heaters or separate storage tank
- Easy-to-remove top cover for convenient access to serviceable parts
- 0" installation clearances on sides and rear, 1-1/2" installation clearance on top
- Handhole cleanout allows easy access to tank interior for cleaning
- 0" clearance to combustibles, approved for installation on combustible floors

CODES AND STANDARDS

- CSA certified and ASME rated T&P relief valve
- Maximum hydrostatic working pressure: 160 psi
- All models are design certified by Underwriters Laboratories (UL), Inc., to ANSI Z21.10.3 - CSA 4.3 Standards
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition ASHRAE/IES 90.1
- Design Certified by Underwriters Laboratories to NSF standard 5 for 180°F (62°C) water
- Complies with SCAQMD Rule 1146.2 and other Air Quality Management Districts with similar requirements for ultra low-NOx emissions
- ASME tank construction standard on all model sizes

VENT REQUIREMENTS FOR SUFL 150A - 250A

Number of 90° Elbows Installed	3 Inch Pipe	4 Inch Pipe
	Maximum Feet (Meters)	Maximum Feet (Meters)
One (1)	45 feet (13.7 meters)	115 feet (35 meters)
Two (2)	40 feet (12.2 meters)	110 feet (33.5 meters)
Three (3)	35 feet (10.7 meters)	105 feet (32 meters)
Four (4)	30 feet (9.1 meters)	100 feet (30.5 meters)
Five (5)	N/A	95 feet (29 meters)
Six (6)	N/A	90 feet (27.4 meters)

VENT REQUIREMENTS FOR SUFL 300A - 500A


Number of 90° Elbows Installed	4 Inch Pipe	6 Inch Pipe
	Maximum Feet (Meters)	Maximum Feet (Meters)
One (1)	65 feet (19.8 meters)	115 feet (35 meters)
Two (2)	60 feet (18.2 meters)	110 feet (33.5 meters)
Three (3)	55 feet (16.8 meters)	105 feet (32 meters)
Four (4)	50 feet (15.2 meters)	100 feet (30.5 meters)
Five (5)	45 feet (13.7 meters)	95 feet (29 meters)
Six (6)	40 feet (12.2 meters)	90 feet (27.4 meters)

GAS PRESSURE REQUIREMENTS


Model Number	Manifold Pressure		Minimum Supply Pressure		Maximum Supply Pressure	
	Natural Gas	Propane Gas	Natural Gas	Propane Gas	Natural Gas	Propane Gas
SUFL-250-150A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	3.5" W.C. (1.10 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)
SUFL-250-199A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	3.5" W.C. (1.10 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)
SUFL-250-250A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	3.5" W.C. (1.10 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)
SUFL-220-300A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	4.8" W.C. (1.19 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)
SUFL-220-400A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	4.8" W.C. (1.19 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)
SUFL-220-500A	0" W.C. (0 kPa)	0" W.C. (0 kPa)	4.8" W.C. (1.19 kPa)	8.5" W.C. (2.12 kPa)	14" W.C. (3.49 kPa)	14" W.C. (3.49 kPa)

Depending on the installed equivalent length, and/or the number of appliances connected, the supply gas line size may need to be increased beyond the minimum required size.

SUFL 150A-250A

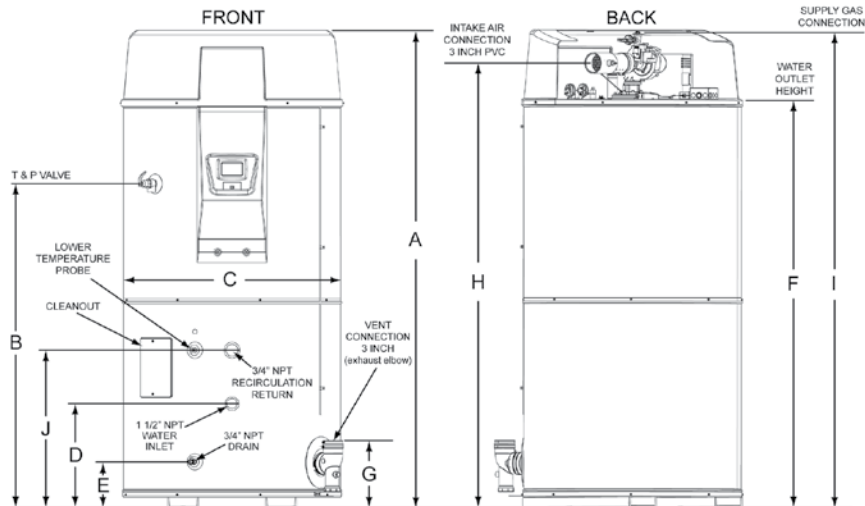

These designs comply with the current edition of the American National Standard for Gas Water Heaters, Volume III, ANSI Z21.10.3 / CSA 4.3 as an automatic circulating tank water heater, and automatic storage water heaters.

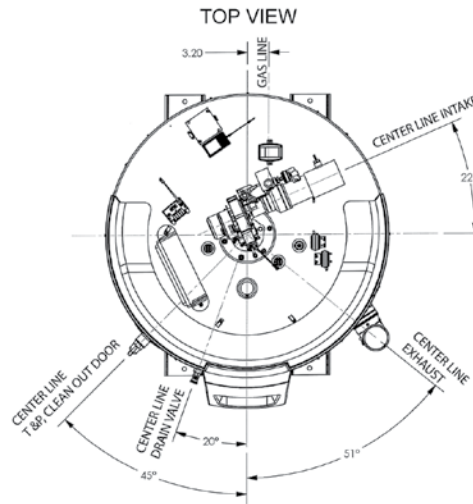

* Center line of water outlet on top of the water heaters is approximately 13 inches from the front edge of the water heater.

Figure 5. Rough-In Dimensions

Model Number	Approx. Capacity		Dimensions										lb/kg	Approx. Shipping Weight
			A	B	C	D	E	F	G	H	I	J		
SUFL-250-150A	Gallons	250	91-1/2	62-5/8	42-1/8	20-1/2	8-1/2	78-1/8	12	85	90-1/8	30-1/2	lb	1125
	Liters	946	232.4	159	107	52	21.6	196.4	30.4	215.9	228.9	77.4	kg	510
SUFL-250-199A	Gallons	250	91-1/2	62-5/8	42-1/8	20-1/2	8-1/2	78-1/8	12	85	90-1/8	30-1/2	lb	1125
	Liters	946	232.4	159	107	52	21.6	196.4	30.4	215.9	228.9	77.4	kg	510
SUFL-250-250A	Gallons	250	91-1/2	62-5/8	42-1/8	20-1/2	8-1/2	78-1/8	12	85	90-1/8	30-1/2	lb	1125
	Liters	946	232.4	159	107	52	21.6	196.4	30.4	215.9	228.9	77.4	kg	510


Electrical characteristics-120V-60Hz A.C., 5.0 A

"A" in model represents ASME construction


Propane gas models available

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

SUFL 300A-500A

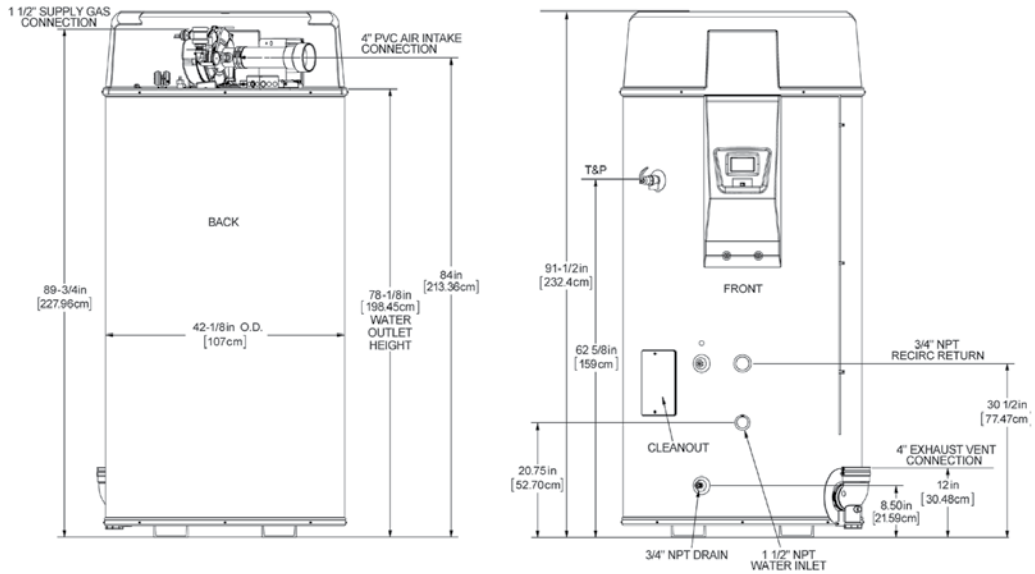

TOP VIEW

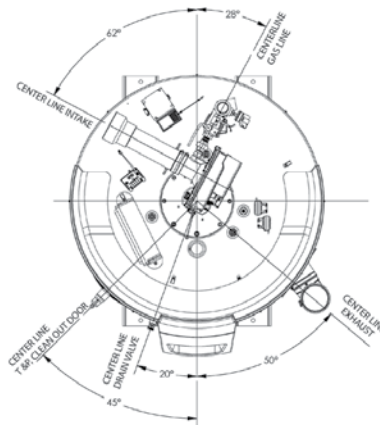

Model Number	Approx. Capacity		Dimensions										lb/kg	Approx. Shipping Weight
			A	B	C	D	E	F	G	H	I	J		
SUFL-220-300A	Gallons	220	91-1/2	62-5/8	42-1/8	20-3/4	8-1/2	78-1/8	12	84	89-3/4	30-1/2	lb	1420
	Liters	833	232.4	159	107	52.7	21.6	196.4	30.4	213.3	227.9	77.4	kg	644
SUFL-220-400A	Gallons	220	91-1/2	62-5/8	42-1/8	20-3/4	8-1/2	78-1/8	12	84	89-3/4	30-1/2	lb	1420
	Liters	833	232.4	159	107	52.7	21.6	196.4	30.4	213.3	227.9	77.4	kg	644
SUFL-220-500A	Gallons	220	91-1/2	62-5/8	42-1/8	20-3/4	8-1/2	78-1/8	12	84	89-3/4	30-1/2	lb	1420
	Liters	833	232.4	159	107	52.7	21.6	196.4	30.4	213.3	227.9	77.4	kg	644

Electrical characteristics-120V-60Hz A.C., 5.0 A

"A" in model represents ASME construction

Propane gas models available

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.



RECOVERY CAPACITY

Model Number	Type of Gas	Input		Thermal Efficiency
		BTU/HR	kW	
SUFL-250-150A	Natural/Propane	150,000	44	96%
SUFL-250-199A	Natural/Propane	199,900	58	95%
SUFL-250-250A	Natural/Propane	250,000	73	94%
SUFL-220-300A	Natural/Propane	300,000	88	94%
SUFL-220-400A	Natural/Propane	399,900	117	93%
SUFL-220-500A	Natural/Propane	499,900	146	92%

Model Number	U.S. GALLONS AND LITRES/HR AT TEMPERATURE RISE INDICATED													
	Approx. Capacity	°F	30° F	40° F	50° F	60° F	70° F	80° F	90° F	100° F	110° F	120° F	130° F	140° F
		°C	17° C	22° C	28° C	33° C	39° C	44° C	50° C	56° C	61° C	67° C	72° C	78° C
SUFL-250-150A	250 U.S. Gals.	GPH	582	436	349	291	249	218	194	175	159	145	134	125
	946 Litres	LPH	2202	1652	1321	1101	944	826	734	661	601	551	508	472
SUFL-250-199A	250 U.S. Gals.	GPH	767	575	460	384	329	288	256	230	209	192	177	164
	946 Litres	LPH	2904	2178	1743	1452	1245	1089	968	871	792	726	670	622
SUFL-250-250A	250 U.S. Gals.	GPH	949	712	570	475	407	356	316	285	259	237	219	203
	946 Litres	LPH	9594	2695	2156	1797	1540	1348	1198	1078	980	898	829	770
SUFL-220-300A	220 U.S. Gals.	GPH	1139	855	684	570	488	427	380	342	311	285	263	244
	832 Litres	LPH	4313	3234	2588	2156	1848	1617	1438	1294	1176	1078	995	924
SUFL-220-400A	220 U.S. Gals.	GPH	1503	1127	902	751	644	563	501	451	410	376	347	322
	832 Litres	LPH	5688	4266	3413	2844	2438	2133	1896	1706	1551	1422	1313	1219
SUFL-220-500A	220 U.S. Gals.	GPH	1858	1394	1115	929	796	697	619	557	507	465	429	398
	832 Litres	LPH	7033	5275	4220	3517	3014	2638	2344	2110	1918	1758	1623	1507

Recovery capacities are based on AHRI rated thermal efficiencies.

STORAGE CAPACITY

Model Number	U.S. Gallons	Liters
SUFL-250-150A	250	946
SUFL-250-199A	250	946
SUFL-250-250A	250	946
SUFL-220-300A	220	833
SUFL-220-400A	220	833
SUFL-220-500A	220	833

GAS LINE CONNECTION SIZE


Model Number	Series	Natural Gas	Propane Gas
SUFL-250-150A	300/301	3/4" NPT	3/4" NPT
SUFL-250-199A	300/301	3/4" NPT	3/4" NPT
SUFL-250-250A	300/301	3/4" NPT	3/4" NPT
SUFL-220-300A	300/301	1-1/4" NPT	1-1/4" NPT
SUFL-220-400A	300/301	1-1/4" NPT	1-1/4" NPT
SUFL-220-500A	300/301	1-1/2" NPT	1-1/4" NPT

OPTIONAL KITS




OPTIONAL CONCENTRIC VENT KITS

- SUFL 150-250 vent kit p/n 100111100
- SUFL 300-500 vent kit p/n 100113124



OPTIONAL LOW PROFILE TERMINATION VENT KITS

- 3" Flush Mount Vent Kit p/n 100187887
- 4" Flush Mount Vent Kit p/n 100187888
- 6" Flush Mount Vent Kit p/n 100187889



OPTIONAL CONDENSATE NEUTRALIZATION KITS

- SUFL 150-199 kit p/n 100112380
- SUFL 250-500 kit p/n 100112381

SPECIFICATION

(Natural or Propane) gas water heater(s) shall be State Ultra Force LV model # _____ or equal, minimum 92% thermal efficiency, a storage capacity of _____ gallons, an input rating of _____ BTUs per hour, a recovery rating of _____ gallons per hour (gph) at 100°F rise and a maximum hydrostatic working pressure of 160 psi. Water heater(s) shall: 1. Modulating gas burner that automatically adjusts the input based on demand. 2. Powered anodes that are non sacrificial and maintenance free. 3. Have seamless glass-lined steel tank construction, with glass lining applied to all water-side surfaces after the tank has been assembled and welded; 4. Meets the thermal efficiency and/or standby loss requirements of the U. S. Department of Energy and current edition of ASHRAE/IES 90.1; 5. Have foam insulation and a CSA Certified and ASME rated T&P relief valve; 6. Have a down-fired power burner designed for precise mixing of air and gas for optimum efficiency, requiring no special calibration on start-up; 7. Be approved for 0" clearance to combustibles.

The control shall be an integrated solid-state temperature and ignition control device with integral diagnostics, graphic user interface, fault history display, and shall have digital temperature readout. No charge connectivity shall be provided allowing for remote viewing and fault notification via app. 1. All models are design certified by Underwriters Laboratories (UL), Inc., according to ANSI Z21.10.3 - CSA 4.3 standards governing storage type water heaters; 2. Meet the thermal efficiency and standby loss requirements of the U. S. Department of Energy and current edition ASHRAE/IES 90.1. Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar requirements for low NOx emissions.

150K-250K BTU Input: For Standard Power Venting: Water heater(s) shall be suitable for power venting using a (3" or 4") _____ diameter PVC pipe for a total distance of (50 ft or 120 ft.) _____ equivalent feet of vent piping. For Power Direct Venting: Water heater(s) shall be suitable for power direct venting using a (3" or 4") _____ diameter PVC pipe for a total distance of (50 ft or 120 ft.) _____ equivalent feet of vent piping and (50 ft. or 120 ft.) _____ equivalent feet of intake air piping.

300K - 500K BTU Input: For Standard Power Venting: Water heater(s) shall be suitable for standard power venting using a (4" or 6") _____ diameter PVC pipe for a total distance of (70 ft. or 120 ft.) _____ equivalent feet of vent piping. For Power Direct Venting: Water heater(s) shall be suitable for power direct venting using a (4" or 6") _____ diameter PVC pipe for a total distance of (70 ft or 120 ft.) _____ equivalent feet of vent piping and (70 ft. or 120 ft.) _____ equivalent feet of intake air piping.

Operation of the water heater(s) in a closed system where thermal expansion has not been compensated for (with a properly sized thermal expansion tank) will void the warranty.

For Technical Information, call 800-527-1953. State Corporation reserves the right to make product changes or improvements without prior notice.